


PLAN 1/50

ROOM AREAS:

ROOM	FLOOR AREA	M/S	1/30	2/1/20	3/1/20	4/1/20
BEDROOM 1	8.6 m ²	0.57	0.28	2.25	1.12	0.82
BEDROOM 2	7.1 m ²	0.47	0.23	1.64	0.82	0.82
BEDROOM 3	9.1 m ²	0.6	0.3	1.64	0.82	0.82

NOTE:
TV TACKLE VENTILATORS OF ROOMS (1/20) TOP PARTS OF WINDOWS FILL ROOMS.

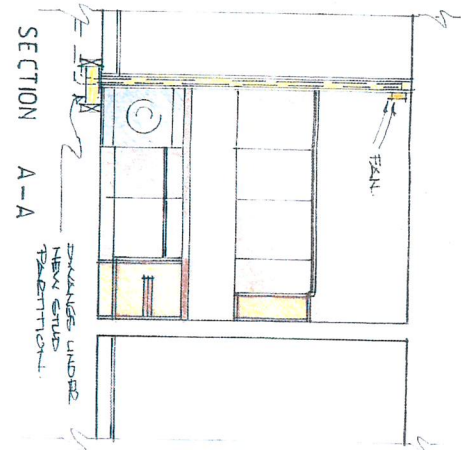


SECTION A-A

P1. PARTITIONS
75/100 x 50mm STUDS @ 450mm CENTERS, HORIZONTALS @ 600mm CENTERS STAGGERED. WITH 12.7mm PLYBOARD AND SKIM COAT FINISH BOTH SIDES. RUN SKIRTINGS TO MATCH. NOTE: DIVANS @ 450mm CENTERS AT FLOOR LEVEL OR DOUBLED JOISTS.

REMOVAL
REMOVE DOOR, STAIRCASE, NIPS AND BACK STOPK ABLE. INSURE 150 X 100 X 45 (G) WITH RAGULAR CONCRETE LINTEL WITH 150mm (G) REST. BOTH SIDE. MAKE GOOD AS FOUND.
NOTE:
ENSURE ADEQUATE SUPPORT CURING ABOVE ALTERATION (E. HEBBLE / FRAM).

NOTE:
SELF CLOSING DOORS TO HAVE STONE SEALS WITH BRUSH INSERTS.

ANY (500) ABOVE FLOOR LEVEL OF SINK, BOXED WATER AND HAVE SCREWED ACCESS COVER.




NOTE: NO NOTCHING OF JOISTS

DRAINAGE DIAGRAM N.T.S.

KITCHEN
SINK TO HAVE COLD WATER MAINS DIRECT FEED HAVE A 38mm ABS PIPE AS WASTE. WITH A WASHING MACHINE TRAP LOCATED ABOVE TRAP
SPACE TO BE PROVIDED FOR A WASHING MACHINE AND FRIDGE - SEE PLAN FOR LOCATIONS
6No. 13 AMP SOCKETS TO BE PROVIDED (MINI)
1No. COOKER CONTROL POINT
ONE CUBIC METRE OF STORAGE (MINI)
EXTRACT FAN TO BE PROVIDED. ACHIEVE 60LTS/SEC/GRATE OF AIR FLOW (MINI) AT HIGH SPEED AND ONE/ARCHAR (MINI) AT LOW SPEED CONSULT PLANS FOR ROUTES AND PIPE DIMENSIONS

GENERAL
ELECTRICS TO COMPLY WITH BS 7671 1982 NOTE: LIGHT FITTINGS AND POWER POINTS ONLY INDICATIVE. FINAL LAYOUT AND NUMBER OF EACH TO BE CLIENTS DECISION
DRAINAGE TO COMPLY WITH PART M OF THE TECHNICAL STANDARDS. ALL PLASTIC PIPEWORK TO BE FITTER TO THE MANUFACTURERS SPEC' AND BE FULLY SUPPORTED ALONG ITS LENGTH. CONSULT PIPE-IN-FLOOR-DETAIL WHERE APPLICABLE
MAKE GOOD ALL FINISHES WHERE WORKS HAVE BEEN CARRIED OUT. REPLACE ALL DAMAGED FLOORBOARDS AND RUN SKIRTINGS FULL LENGTH AT ALTERATIONS

SMOKE ALARMS TO BE PROVIDED WHERE APPLICABLE. COMPLY TO BS 5446 PART 1 1990. BE LINKED OFF SEPARATE MAINS AND LOCATED 300mm AWAY FROM ANY DOWNSTAND BEAMLIGHT FITTING AND NO MORE THAN 3000mm FROM DOORWAY OF AN APARTMENT

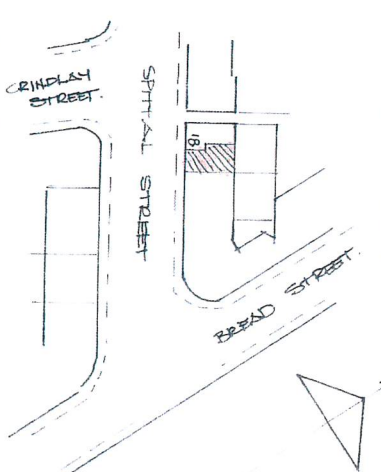

LOCATION PLAN 1/1250

FOUNDATIONS Building Consultants
4 AMERCORN ROAD EDINBURGH EH8 7JH
TEL: 011 652 9281 FAX: 011 652 1522

ALTER DWELLING HOUSE
1/8 (GFR) SPITAL ST, EDIN.
GEANT DEVELOPMENT
DATE: 11/03 1647 10/04